DRDNTRL

STAGE VI

DORADO Natural 70 | 80 | 90 | 100



[CODENAME]

DORADO NATURAL

DISTINGUISHING FEATURES

NATURALLY A WINNER



MISSION

NATURALLY A WINNER.

As simple to use as it is rich in technological content, the SAME Dorado Natural stands out for its great versatility too, working in the best possible way both in the open field and in limited spaces (i.e. greenhouses, stables).

The new FARMotion 35 engines, together with optimum comfort and a wide choice of configurations are characteristics that make the SAME Dorado Natural the ideal tractor for winning every match. The new cab provides a modern, comfortable and ergonomic work environment, and the new transmissions not only ensure the right pace out in the field but are also designed to travel at 40 km/h on the road with the engine running in economy mode.

The SAME Dorado Natural range offers models that boast excellent manoeuvrability, to move easily in even the narrowest spaces, and a torque supply that's ideal for the agricultural context. At the same time, the tried and tested 5-speed transmissions - completed with modern electro hydraulic engagement for front wheel drive and differential locking - guarantee excellent traction and robustness, allowing even the hardest field work to be easily carried out.






BÖRN FOR AGRICULTURE.

An engine conceived for farming. In day to day use, the difference this makes is clear!

The Dorado Natural range comprises 4 models from 66 to 102 HP, powered by advanced 3-cylinder FARMotion 35 engines that not only offer compactness and proven reliability but also efficiency and minimal maintenance needs. The innovative FARMotion 35 engine is purposely designed, in fact, for agricultural use; the 3-cylinder version is fitted on the SAME Dorado Natural, to enhance the already excellent handling of these machines. The use of a viscostatic fan, turbocharger with intercooler and waste-gate valve, along with a common rail injection system up to 2,000 bar and the latest 7-hole piezoelectric injectors (for optimum diesel spraying to ensure efficient combustion), produces first class results whilst at the same time keeping diesel consumption at the lowest levels in this category. Furthermore, the FARMotion

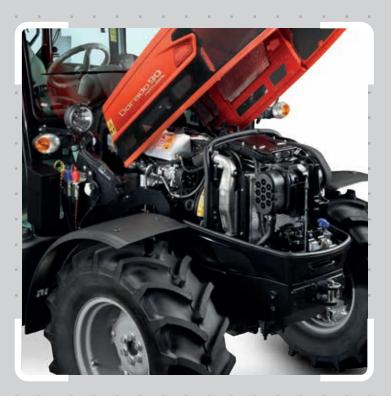

35 engines offer almost constant power supply over a wide speed range and with high torque, even at low rotation speeds. The advanced conception and innovative technical solutions ensure that FARMotion 35 engines comply with the limits envisaged by Stage V in terms of polluting emissions, merely using the DOC+DPF (for the models 70 and 80) or DOC+DPF+SCR (for the models 90-100). FARMotion 35 engines are distinguished by their outstanding performance figures: the maximum rotation speed is only 2,200 rpm; the version installed on the SAME Dorado 100 Natural provides a torque reserve of 35% and it develops a maximum torque of 417 Nm." Apart from optimising consumption, the fully electronic diesel injection control also allows two work speeds to be memorised. These are directly activated from the driver's seat by means of a dedicated button command, leaving the ECU with the task of proportioning fuel use on the basis of the load. This means the connected attachments can be used in a smooth manner, even with the sudden load variations that are a typical feature of many types of agricultural work. The new layout underneath the bonnet offers a sheltered, protected area for both the DOC catalytic converter and the new PowerCore 2-stage air filter which can be fitted upon request with a dust ejector). Two practical sliding screens have been added, to protect the radiator pack and facilitate maintenance.

.<mark>70</mark>: _66 HP / .48,9 kW

80: .76 HP: / .55.8 kW

90: - 91 HP / -67-kW

100. 102 HP / 75 kW

RANSMISSION, J AND HYDRAUL

OP IN TERMS O SATILITY AND SAF



· Modular, reliable transmissions with optimum efficiency; large-capacity hydraulic pumps and powerful handlers; PTO 540 ECO as standard, and front wheel brakes for real integral braking - these are just a few of the special. features of the new SAME Dorado Natural range.

Two different transmission configurations further increase the versatility of the Dorado Natural. The standard one offers 5 speeds for 3 ranges, with the shortest gear ratio. enabling the tractor to move forward at a mere 298 m/h (with the engine at maximum speed); on the other hand, it can travel at 40 km/h with the engine running at just 1,800 rpm, which means significant fuel savings during fast movement on the road.

With the optional splitter (activated by means of a handy lever just beneath the steering wheel), the forward gear ratios are doubled (producing a combination of 30+15) and the shortest gear ratio enables movements of just 245 m/h (with the engine running at maximum speed). To further boost productivity levels, electrohydraulic front wheel drive and front and rear differential locking are standard.

The front axle, entirely designed and built by SAME, has a maximum steering angle of 55°, with a maximum permitted load of 2,300 kg, and the front wheels are fitted with brake discs for absolute safety.



PTO AND HYDRAULICS

The PTO comes as standard with 540 rpm and 540 ECO speed modes, but a 1,000 rpm mode or groundspeed PTO can also be added as an option. The dedicated clutch is mechanically engaged by means of a handy lever, so it's very easy to insert it gradually.

The Dorado Natural can also be successfully coupled with very demanding hydraulic equipment: the models in the range are in fact equipped with a 56 l/min pump dedicated to the rear linkage and auxiliary 4-coupler distributors (6 couplers as an option) with classic mechanical control. The steering circuit is served by an additional independent 20 I/ min pump for maximum safety and smooth driving even when the engine is at minimum speed. The rear linkage has a maximum capacity of 2,500 kg close to the ball joints, increased to 3,500 kg with the additional optional cylinders. For rear lift control is now available the EasyLift system that allows to raise and lower the implements using a single button on the console.




The ideal front loader tractor



DRIVING POSITION

TOP CLASS COMPORT.



The new Dorado Natural cab is the result of a thorough design study to obtain first-rate comfort: the platform is suspended on special Silent-Blocks, which effectively dampen the transmission vibration. The driver's seat is equipped with efficient mechanical suspension with adjustable rigidity, adapting to the driver's weight whilst still ensuring excellent vibration mitigation. For those aiming for even greater comfort, the optional configurations include a seat with pneumatic suspension.

The new command layout is designed to be rational, highly responsive and user-friendly. The analogue/digital display follows the steering column in the correct adjustment of the till, thus ensuring a clear view of the machine's main operating parameters at all times. The new Dorado Natural can also be fitted with an optional high-visibility panoramic roof, or a type-approved FOPS roof for protection against objects that accidentally fall from above.



DORADO NATURAL

		70	00	99	100	
		70	80	90	100	
ENGINE						
Туре		FARMation 35				
Emission level		Stage V				
Cylinders/Displacement	n°/cc	3 / 2.887				
Bore/Stroke	mm	103 / 115,5 Turbo Intercooler				
Aspiration	Tugo	Turbo Intercooler Common Rail @ 2.000 bar				
Injection @ pressure Max. power @ 2.000 rpm	Type kW/Hp	48,9 / 66	55,8 / 76	@ 2.000 bar 67 / 9ì	75 / 102	
Rated power @ 2.200 rpm	kW/Hp	48,9765	55,8 / 76	63,5 / 86	71,1 / 97	
Max. torque	Nm	297 @ 1.500	341 @ 1.500	372 @ 1.400	417 @ 1.400	
Torque rise	%	16	28	35	35	
VISCO cooling fan	76	<u> </u>	<u> </u>	<u> </u>	<u> </u>	
Fuel tank / AdBlue		90/-				
EAT	System	DOC + DPF DOC + DPF + SCR				
TRANSMISSION						
SDF transmission	Туре		T330	00		
Gearbox	п°		5 gears x	3 ranges		
STD TRANSMISSION						
Shuttle	Туре		Mechanical with lever u	under steering wheel		
N° of speed	п°	15 + 15				
Max. speed	Km/h	40 ECO (@ 1.800 engine rpm)				
Min. speed	m/h		29	8		
OPT TRANSMISSION WITH SPLITTER						
Shuttle	Туре		Mechanical with lever	-		
Splitter	Туре		Mechanical, integrated with shuttle lever			
N° of speed	п°		30 + 15			
Max. speed	Km/h	40 ECO (@ 1.800 engine rpm)				
Min. speed	m/h	245				
PTO						
Mechanical engagement		<u> </u>	A	A	<u> </u>	
540/540ECO		_		_	_	
540/540ECO/1000 540/540ECO + Groundspeed PTO		0	0	0	0	
LIFT		0	0	0	0	
Mechanical rear lift	i i	A	A	A		
Mechanical rear lift with "EASYLIFT"		0	0	0	0	
Rear lifting capacity (STD)	Кд	2.500	2.500	2.500	2.500	
Rear lifting capacity (OPT)	Kg	3.500	3.500	3.500	3.500	
HYDRAULICS	119	5.500	3.300	2.500	2,200	
Pump flow (STD)	I/min	48	48	48	48	
Pump flow (OPT)	l/min	56	56	56	56	
Rear spool valves	п°	2/3	2/3	2/3	2/3	
BRAKES						
4 wheel braking		A	A	A	A	
Mechanical parking brake		A	A	A	A	
Hydraulic Dual Mode trailer brake		0	0	0	0	
4WD FRONT AXLE						
Front axle	Size	1	1	1	1	
	0				55	
Steering angle		55	55	55		
Steering angle Electrohydraulic 4WD engagement		A	A	A	A	
Steering angle Electrohydraulic 4WD engagement Electrohydraulic Diff Lock engagement						
Steering angle Electrohydraulic 4WD engagement Electrohydraulic Diff Lock engagement CAB		A A	A A	A	A	
Steering angle Electrohydraulic 4WD engagement Electrohydraulic Diff Lock engagement CAB Adjustable steering column		A A	A A	A A	A A	
Steering angle Electrohydraulic 4WD engagement Electrohydraulic Diff Lock engagement CAB Adjustable steering column Openable front and rear windows		A A	A A	A A	A A A	
Steering angle Electrohydraulic 4WD engagement Electrohydraulic Diff Lock engagement CAB Adjustable steering column Openable front and rear windows Pneumatic seat suspension		A A O	A A O	A A O	A A O	
Steering angle Electrohydraulic 4WD engagement Electrohydraulic Diff Lock engagement CAB Adjustable steering column Openable front and rear windows Pneumatic seat suspension Manual A/C		A A O O	A A O	A A O O	A A O O	
Steering angle Electrohydraulic 4WD engagement Electrohydraulic Diff Lock engagement CAB Adjustable steering column Openable front and rear windows Pneumatic seat suspension Manual A/C High visibility roof		A A O O O O	A A O O	A A O O O O	A A O O O	
Steering angle Electrohydraulic 4WD engagement Electrohydraulic Diff Lock engagement CAB Adjustable steering column Openable front and rear windows Pneumatic seat suspension Manual A/C High visibility roof FOPS certification		A A O O	A A O	A A O O	A A O O	
Steering angle Electrohydraulic 4WD engagement Electrohydraulic Diff Lock engagement CAB Adjustable steering column Openable front and rear windows Pneumatic seat suspension Manual A/C High visibility roof FOPS certification DIMENSIONS	Sino	A A O O O O O	A A O O O	A A O O O O O O	A A O O O O O	
Steering angle Electrohydraulic 4WD engagement Electrohydraulic Diff Lock engagement CAB Adjustable steering column Openable front and rear windows Pneumatic seat suspension Manual A/C High visibility roof FOPS certification DIMENSIONS With rear tyre	Size	▲	▲	▲	▲	
Steering angle Electrohydraulic 4WD engagement Electrohydraulic Diff Lock engagement CAB Adjustable steering column Openable front and rear windows Pneumatic seat suspension Manual A/C High visibility roof FOPS certification DIMENSIONS With rear tyre Wheelbase	mm	▲	▲	▲	▲	
Steering angle Electrohydraulic 4WD engagement Electrohydraulic Diff Lock engagement CAB Adjustable steering column Openable front and rear windows Pneumatic seat suspension Manual A/C High visibility roof FOPS certification DIMENSIONS With rear tyre Wheelbase Max. length	mm mm	▲	▲	▲	▲	
Steering angle Electrohydraulic 4WD engagement Electrohydraulic Diff Lock engagement CAB Adjustable steering column Openable front and rear windows Pneumatic seat suspension Manual A/C High visibility roof FOPS certification DIMENSIONS With rear tyre Wheelbase Max. length Centre rear axle – Cab	mm mm	▲	▲	▲	▲	
Steering angle Electrohydraulic 4WD engagement Electrohydraulic Diff Lock engagement CAB Adjustable steering column Openable front and rear windows Pneumatic seat suspension Manual A/C High visibility roof FOPS certification DIMENSIONS With rear tyre Wheelbase Max. length Centre rear axle – Cab Total height	mm mm mm	▲	▲	▲	▲	
Steering angle Electrohydraulic 4WD engagement Electrohydraulic Diff Lock engagement CAB Adjustable steering column Openable front and rear windows Pneumatic seat suspension Manual A/C High visibility roof FOPS certification DIMENSIONS With rear tyre Wheelbase Max. length Centre rear axle – Cab Total height	mm mm mm mm	▲	▲	▲	▲ ▲	
Steering angle Electrohydraulic 4WD engagement Electrohydraulic Diff Lock engagement CAB Adjustable steering column Openable front and rear windows Pneumatic seat suspension Manual A/C High visibility roof FOPS certification DIMENSIONS With rear tyre Wheelbase Max. length Centre rear axle – Cab Total height	mm mm mm	▲	▲	▲	▲	

▲ STD o OPT

- Not available




[STAGE-V]

DORADO Natural 70 | 80 | 90 | 100









The technical data and images contained herein are indicative only. SAME reserves the right to modify its products at any time without prior notice.

